

# PRO ECO SLIM

30-50-65



## Wall-hung electric storage water heater



TITANIUM



GUARANTEE OF QUALITY




POLYURETHANE INSULATION



SLIM

- EXCLUSIVE DESIGN
- HIGH PRECISION NTC TEMPERATURE SENSORS
- EASY AND FAST RESET
- OVERSIZE MAGNESIUM ANODE
- HIGH EFFICIENCY WITH EXPANDED POLYURETHANE INSULATION
- PRESSURE SAFETY VALVE TESTED AT 8 BAR
- PRODUCT TESTED TO THE HIGHEST QUALITY STANDARDS
- TITANIUM GLASSLINED INNER TANK TESTED AT 16 BAR

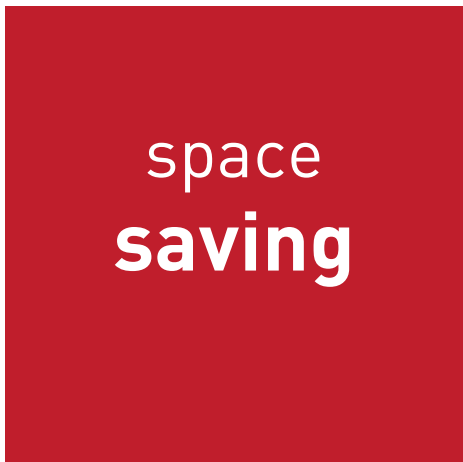

### Technical data - Overall dimensions

	PRO ECO SLIM								PRO ECO SLIM							
	30 V Slim 1,8K PL	40 V Slim 1,8K PL	50 V Slim 1,8K PL	65 V Slim 1,8K PL	80 V Slim 1,8K PL	50 H Slim 1,8K PL	65 H Slim 1,8K PL		30V	40V	50V	65V	80V	50H	65H	
Capacity	l	30	40	50	65	80	50	65	a	mm	588	837	981	1178	837	981
Installation	V	V	V	V	V	V	H	H	b	mm	443	692	836	1033	-	-
TD/TS	-	-	-	-	-	-	-	-	d	mm	443	-	-	-	491	635
Size		Slim	Slim	Slim	Slim	Slim	Slim	Slim								
Power	kW	1,8	1,8	1,8	1,8	1,8	1,8	1,8								
Voltage	V	230	230	230	230	230	230	230								
Heating time (ΔT=45°C)	h,min	55'	1:13'	1:32'	1:59'	2:27'	1:32'	1:59'								
Heat dispersion at 65°C	kWh/24h	0,85	1,04	1,21	1,35	1,53	1,31	1,43								
Max working pressure	bar	8	8	8	8	8	8	8								
Max working temperature	°C	80	80	80	80	80	80	80								
Weight	kg	14,5	15,5	16,5	19,5	22	16,5	19,5								
Class	IP	IPX	IPX3	IPX3	IPX3	IPX3	IPX1	IPX1								

PRO ECO 30 V PL  
3605196

PRO ECO 40 V PL  
3700209





PRO ECO 50 V PL  
3700210

PRO ECO 65 V PL  
3700211

PRO ECO 80 V PL  
3700212

PRO ECO 50 H PL  
3700213

PRO ECO 65 H PL  
3700214

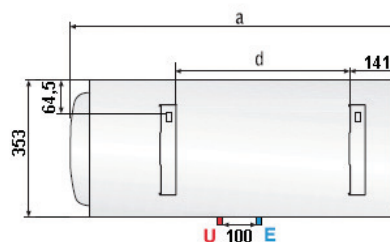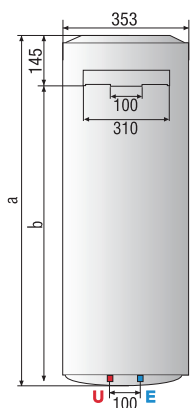

LEGEND

- E** Cold water inlet G 1/2"
- U** Hot water outlet G 1/2"